


The GX Touch 50 and the CERBO GX are enlarged visible in this drawing.



**CERBO GX**

**IMPORTANT INFORMATION!**  
The SmartBatteryProtect must be programmed for Li-Ion mode and 12 Volt either through programming on the device itself or with a bluetooth enabled smartphone or tablet.

**SMART BATTERY PROTECT 220**  
Lodde 1 011 3

**IMPORTANT INFORMATION!**  
Victron Smart Lithium Batteries charge & discharge controlled by BMS & CERBO. In systems with Victron Smart Lithium Batteries, it's important that all charging devices as well as loads are controlled by the BMS. Here is how that is taken care of in this system:  
1. MultiPlus Inverter/charger: digitally via the GX Device, DVCC feature.  
2. Solar charger: digitally via the GX Device, DVCC feature.  
3. Orion Tr ATC: wire control, using the switched positive wire from the engine ignition through the ATC contacts on the BMS and from there towards each Orion Tr.  
4. DC Loads: via SmartBattery Protect 220.  
5. AC Loads: controlled together with the MultiPlus Inverter/Charger.

**LYNX DISTRIBUTORS WITH LYNX SMART BMS**


**MAIN SWITCH-2**  
Dual Circuit

**MAIN SWITCH-1**  
Single Circuit Dual Output













**2 x Lithium 12.8V-300Ah Smart LiFePO4**

**KEEP POSITIVE BATTERY CABLES ALL AS SHORT AS POSSIBLE AND ALL AT THE SAME LENGTH!**  
**KEEP NEGATIVE BATTERY CABLES ALL AS SHORT AS POSSIBLE AND ALL AT THE SAME LENGTH!**

**Lynx Smart BMS Enlarged connections**

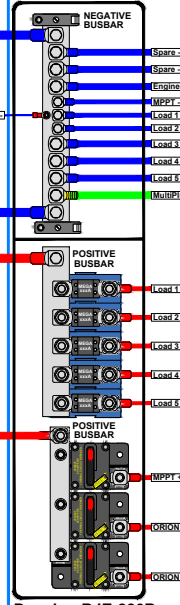

Drawing BJE-286B



**IMPORTANT INFORMATION!**  
Recommended AC In cable/breaker size MultiPlus  
With Power assist the MultiPlus can add 50W to the output but when power is present on AC IN. During battery operation this all adds up to the max sum of input and output current of 50+13=63A. An Earth leakage device with breaker or a combination MCB/RCD must be installed on the output. Cable size must be adjusted accordingly.

**IMPORTANT INFORMATION!**  
Recommended AC In cable/breaker size MultiPlus  
AC In must be protected by a circuit breaker rated of 60A max or less. This depends heavily on the size of the connected power source. The input current must be adjusted to fit the size of the connected power source. The breaker and cable size for AC IN should be adjusted accordingly.

**IMPORTANT INFORMATION!**  
Recommended AC Out-2 cable/breaker size MultiPlus  
AC Out-2 only is available when power is present on AC IN. During battery operation it will be disconnected. AC Out-2 supports up to 16A. An Earth leakage device with breaker or a combination MCB/RCD must be installed on the output. Cable size must be adjusted accordingly.

**IMPORTANT INFORMATION!**  
Recommended DC cable/breaker size MultiPlus  
0.5 m cable length; 4 x 8602mm, 5-10 m cable length; 4 x 7052mm. When used in closed conduits, cable size should double. Cable length stands for the distance between the battery and the MultiPlus connections. Recommendations are without other loads in the system and these also should be taken into account for proper main battery, main fuse & main switch cables.!! Fuse size should be 400A.

**IMPORTANT INFORMATION!**  
The primary Case ground connection from a Inverter charger like a Multi or a Quattro, must be connected to the Central Negative Busbar of the DC system. Size of this cable must be identical to connected DC negative.

**IMPORTANT INFORMATION!**  
When operating in inverter mode, The Neutral output of a Inverter/charger must be connected to ground to guarantee proper functioning of a GFCI or RCD device. In case of a split phase supply the Neutral also must be grounded.

**WARNING**  
230 VOLT AC IS EXTREMELY HAZARDOUS !!!  
DO NOT TOUCH ANY LIVE WIRED PARTS OF THE INSTALLATION !!!  
WHEN IN DOUBT, ALWAYS CONSULT YOUR VICTRON DEALER !!!

AC DISTRIBUTION from MultiPlus AC Out-1 & AC Out-2

GENERATOR 4KW 230V/50Hz AC

230V Switched load-1  
230V Switched load-2  
230V No Break load-1  
230V No Break load-2

Blue Smart charger